



## TFT LCD Preliminary Specification

# MODEL NO.: N141C3 - L07

Customer: HP

Approved by:

Note:

| 記錄                         | 工作                   | 審核                                  | 角色       | 投票     |
|----------------------------|----------------------|-------------------------------------|----------|--------|
| 2008-06-03<br>13:37:00 CST | PMMD III<br>Director | annie_hsu(徐凡<br>琇/56522 /<br>54873) | Director | Accept |



## - CONTENTS -

|                                         |    |
|-----------------------------------------|----|
| REVISION HISTORY                        | 3  |
| 1. GENERAL DESCRIPTION                  | 4  |
| 1.1 OVERVIEW                            |    |
| 1.2 FEATURES                            |    |
| 1.3 APPLICATION                         |    |
| 1.4 GENERAL SPECIFICATIONS              |    |
| 1.5 MECHANICAL SPECIFICATIONS           |    |
| 2. ABSOLUTE MAXIMUM RATINGS             | 5  |
| 2.1 ABSOLUTE RATINGS OF ENVIRONMENT     |    |
| 2.2 ELECTRICAL ABSOLUTE RATINGS         |    |
| 2.2.1 TFT LCD MODULE                    |    |
| 2.2.2 BACKLIGHT UNIT                    |    |
| 3. ELECTRICAL CHARACTERISTICS           | 7  |
| 3.1 TFT LCD MODULE                      |    |
| 3.2 BACKLIGHT UNIT                      |    |
| 4. BLOCK DIAGRAM                        | 11 |
| 4.1 TFT LCD MODULE                      |    |
| 4.2 BACKLIGHT UNIT                      |    |
| 5. INPUT TERMINAL PIN ASSIGNMENT        | 12 |
| 5.1 TFT LCD MODULE                      |    |
| 5.2 BACKLIGHT UNIT                      |    |
| 5.3 TIMING DIAGRAM OF LVDS INPUT SIGNAL |    |
| 5.4 COLOR DATA INPUT ASSIGNMENT         |    |
| 5.5 EDID DATA STRUCTURE                 |    |
| 6. INTERFACE TIMING                     | 18 |
| 6.1 INPUT SIGNAL TIMING SPECIFICATIONS  |    |
| 6.2 POWER ON/OFF SEQUENCE               |    |
| 7. OPTICAL CHARACTERISTICS              | 20 |
| 7.1 TEST CONDITIONS                     |    |
| 7.2 OPTICAL SPECIFICATIONS              |    |
| 8. PRECAUTIONS                          | 23 |
| 8.1 HANDLING PRECAUTIONS                |    |
| 8.2 STORAGE PRECAUTIONS                 |    |
| 8.3 OPERATION PRECAUTIONS               |    |
| 9. PACKING                              | 25 |
| 9.1 CARTON                              |    |
| 9.2 PALLET                              |    |
| 10. DEFINITION OF LABELS                | 27 |
| 10.1 CMO MODULE LABEL                   |    |
| 10.2 CMO CARTON LABE                    |    |

**REVISION HISTORY**

| Version | Date         | Page<br>(New) | Section | Description                                 |
|---------|--------------|---------------|---------|---------------------------------------------|
| 1.0     | Mar.25,'08   | All           | All     | Preliminary specification was first issued. |
| 1.1     | May. 08, 08' | 23, 24        | 9       | Packing method update                       |
| 1.1     | May. 08, 08' | 29            | 11      | Outline Drawing update                      |



## 1 GENERAL DESCRIPTION

### 1.1 OVERVIEW

N141C3 - L07 is a 14.1" TFT Liquid Crystal Display module with single CCFL Backlight unit and 30 pins LVDS interface. This module supports 1440 x (3 BGR) x 900 WXGA+ mode and can display 262,144 colors. The optimum viewing angle is at 6 o'clock direction. The inverter module for backlight is not built in.

### 1.2 FEATURES

- Thin and Light Weight
- WXGA+ (1440 x 900 pixels) resolution
- DE only mode
- 3.3V LVDS (Low Voltage Differential Signaling) interface with 2 pixel/clock
- RoHS compliance

### 1.3 APPLICATION

- TFT LCD Notebook

### 1.4 GENERAL SPECIFICATIONS

| Item               | Specification                               | Unit  | Note |
|--------------------|---------------------------------------------|-------|------|
| Active Area        | 303.48(H) X 189.675(V) (14.1 inch Diagonal) | mm    | (1)  |
| Bezel Opening Area | 306.76 (H) x 193.0 (V)                      | mm    |      |
| Driver Element     | a-si TFT active matrix                      | -     | -    |
| Pixel Number       | 1440 x B.G.R. x 900                         | pixel | -    |
| Pixel Pitch        | 0.21075 (H) x 0.21075 (V)                   | mm    | -    |
| Pixel Arrangement  | BGR vertical stripe                         | -     | -    |
| Display Colors     | 262,144                                     | color | -    |
| Transmissive Mode  | Normally white                              | -     | -    |
| Surface Treatment  | Anti-glare and Hard Coat (3H min.)          | -     | -    |

### 1.5 MECHANICAL SPECIFICATIONS

| Item        |               | Min. | Typ.  | Max. | Unit | Note |
|-------------|---------------|------|-------|------|------|------|
| Module Size | Horizontal(H) | 319  | 319.5 | 320  | mm   | (1)  |
|             | Vertical(V)   | 205  | 205.5 | 206  | mm   |      |
|             | Depth(D)      | --   | 5.2   | 5.5  | mm   |      |
| Weight      |               | --   | 400   | 415  | g    |      |

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions

## 2 ABSOLUTE MAXIMUM RATINGS

### 2.1 ABSOLUTE RATINGS OF ENVIRONMENT


| Item                          | Symbol           | Value |       | Unit | Note     |
|-------------------------------|------------------|-------|-------|------|----------|
|                               |                  | Min.  | Max.  |      |          |
| Storage Temperature           | T <sub>ST</sub>  | -20   | +60   | °C   | (1)      |
| Operating Ambient Temperature | T <sub>OP</sub>  | 0     | +50   | °C   | (1), (2) |
| Shock (Non-Operating)         | S <sub>NOP</sub> | -     | 220/2 | G/ms | (3), (5) |
| Vibration (Non-Operating)     | V <sub>NOP</sub> | -     | 1.5   | G    | (4), (5) |

Note (1) (a) 90 %RH Max. (Ta ≤ 40 °C).

(b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).

(c) No condensation.

Note (2) The temperature of panel display surface area should be 0 °C Min. and 60 °C Max..

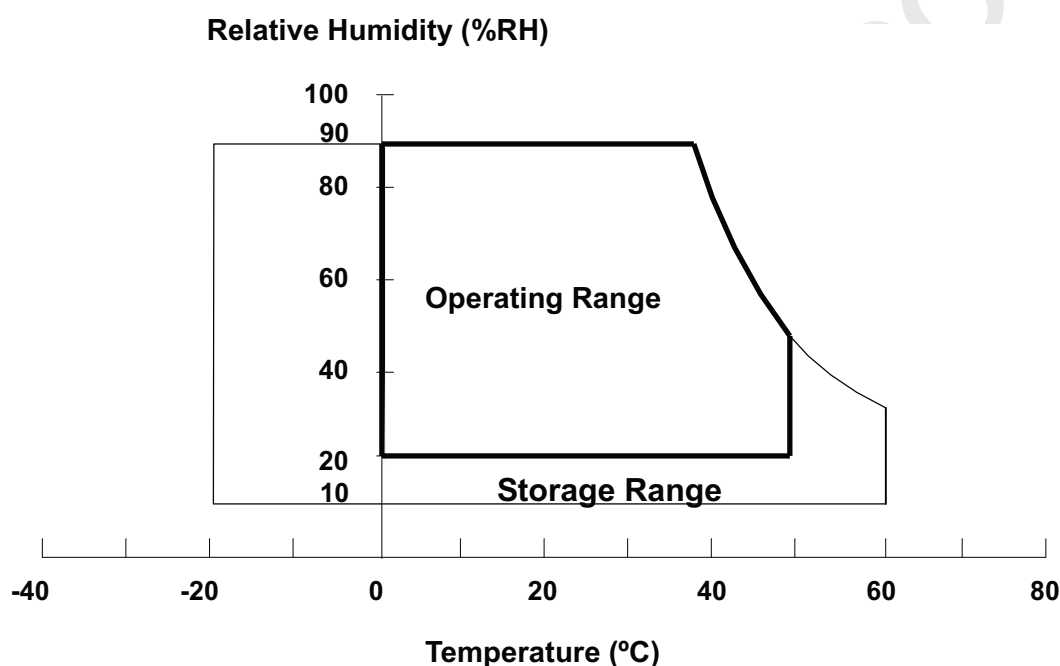


Note (3) 1 time for ± X, ± Y, ± Z. for Condition (220G / 2ms) is half Sine Wave,.

Note (4) 10 ~ 500 Hz, 30 min / Cycle, 1 cycles for each X, Y, Z axis.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

The fixing condition is shown as below:

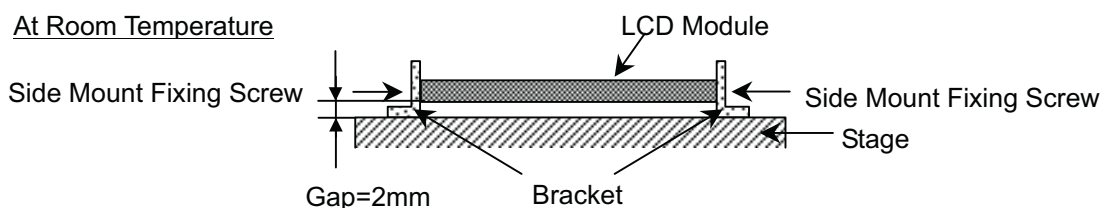

## 2.2 ELECTRICAL ABSOLUTE RATINGS

### 2.2.1 TFT LCD MODULE

| Item                 | Symbol   | Value |              | Unit | Note |
|----------------------|----------|-------|--------------|------|------|
|                      |          | Min.  | Max.         |      |      |
| Power Supply Voltage | $V_{CC}$ | -0.3  | +4.0         | V    | (1)  |
| Logic Input Voltage  | $V_{IN}$ | -0.3  | $V_{CC}+0.3$ | V    |      |

### 2.2.2 BACKLIGHT UNIT

| Item           | Symbol | Value |      | Unit       | Note     |
|----------------|--------|-------|------|------------|----------|
|                |        | Min.  | Max. |            |          |
| Lamp Voltage   | $V_L$  | -     | 2.5K | $V_{RMS}$  | (1), (2) |
| Lamp Current   | $I_L$  | 2.0   | 6.5  | $mA_{RMS}$ | (1), (2) |
| Lamp Frequency | $F_L$  | 45    | 80   | KHz        |          |

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for lamp (Refer to 3.2 for further information).

### 3 ELECTRICAL CHARACTERISTICS

#### 3.1 TFT LCD MODULE

 $T_a = 25 \pm 2^\circ\text{C}$ 


| Parameter                              |       | Symbol                | Value |      |       | Unit | Note                          |
|----------------------------------------|-------|-----------------------|-------|------|-------|------|-------------------------------|
|                                        |       |                       | Min.  | Typ. | Max.  |      |                               |
| Power Supply Voltage                   |       | V <sub>CC</sub>       | 3.0   | 3.3  | 3.6   | V    | -                             |
| Permissible Ripple Voltage             |       | V <sub>RP</sub>       | -     | 50   | -     | mV   | -                             |
| Rush Current                           |       | I <sub>RUSH</sub>     | -     | -    | 1.5   | A    | (2)                           |
| Initial Stage Current                  |       | I <sub>IS</sub>       | -     | -    | 1.0   | A    | (2)                           |
| Power Supply Current                   | White | I <sub>CC</sub>       | -     | 360  | -     | mA   | (3)a                          |
|                                        | Black |                       | -     | 450  | -     | mA   | (3)b                          |
| LVDS Differential Input High Threshold |       | V <sub>TH(LVDS)</sub> | -     | -    | +100  | mV   | (5),<br>V <sub>CM</sub> =1.2V |
| LVDS Differential Input Low Threshold  |       | V <sub>TL(LVDS)</sub> | -100  | -    | -     | mV   | (5)<br>V <sub>CM</sub> =1.2V  |
| LVDS Common Mode Voltage               |       | V <sub>CM</sub>       | 1.125 | -    | 1.375 | V    | (5)                           |
| LVDS Differential Input Voltage        |       | V <sub>ID</sub>       | 100   | -    | 600   | mV   | (5)                           |
| Terminating Resistor                   |       | R <sub>T</sub>        | -     | 100  | -     | Ohm  | -                             |
| Power per EBL WG                       |       | P <sub>ERI</sub>      | -     | 3.54 | -     | W    | (4)                           |

Note (1) The ambient temperature is  $T_a = 25 \pm 2^\circ\text{C}$ .

Note (2) I<sub>RUSH</sub>: the maximum current when V<sub>CC</sub> is rising

I<sub>IS</sub>: the maximum current of the first 100ms after power-on

Measurement Conditions: Shown as the following figure. Test pattern: black.

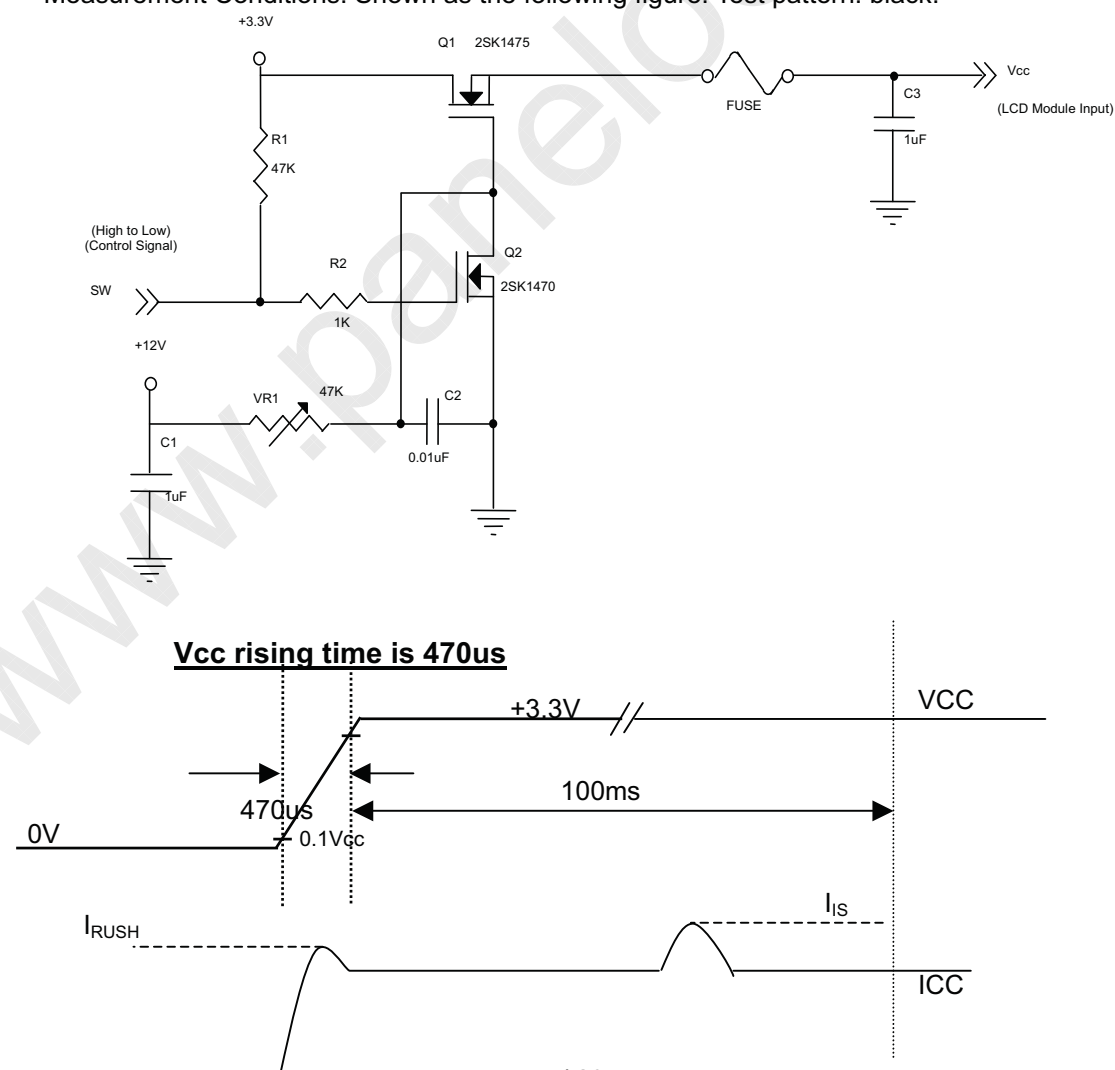



**CHI MEI**  
OPTOELECTRONICS CORP.

Doc No.: 44084142  
Issued Date: May 06, 2008  
Model No.: N141C3 - L07

**Preliminary**


Note (3) The specified power supply current is under the conditions at  $V_{CC} = 3.3\text{ V}$ ,  $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ ,  $f_v = 60\text{ Hz}$ , whereas a power dissipation check pattern below is displayed.

a. White Pattern



Active Area

b. Black Pattern




Active Area

Note (4) The specified power are the sum of LCD panel electronics input power and the inverter input power. Test conditions are as follows.


- (a)  $V_{CC} = 3.3\text{ V}$ ,  $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ ,  $f_v = 60\text{ Hz}$ ,
- (b) The pattern used is a black and white 32 x 36 checkerboard, slide #100 from the VESA file "Flat Panel Display Monitor Setup Patterns", FPDMSU.ppt.
- (c) Luminance: 60 nits.
- (d) The inverter used is provided from Sumida. Please contact them for detail information. CMO doesn't provide the inverter in this product.

Note (5) The parameters of LVDS signals are defined as the following figures.

**Single Ended**

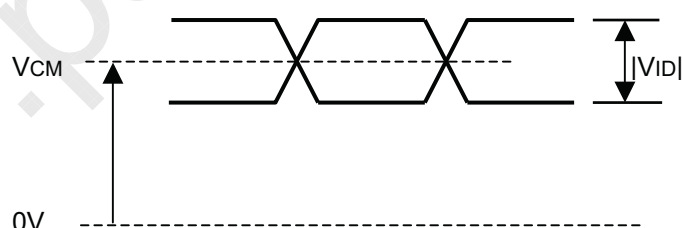

**Differential**

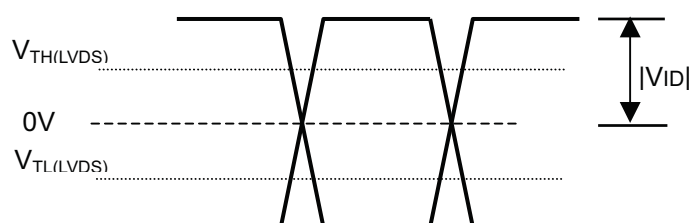




## 3.2 BACKLIGHT UNIT

Ta = 25 ± 2 °C

| Parameter            | Symbol          | Value  |      |              | Unit              | Note                         |
|----------------------|-----------------|--------|------|--------------|-------------------|------------------------------|
|                      |                 | Min.   | Typ. | Max.         |                   |                              |
| Lamp Input Voltage   | V <sub>L</sub>  | 612    | 680  | 748          | V <sub>RMS</sub>  | I <sub>L</sub> = 6.0 mA      |
| Lamp Current         | I <sub>L</sub>  | 2.0    | 6.0  | 6.5          | mA <sub>RMS</sub> | (1)                          |
| Lamp Turn On Voltage | V <sub>S</sub>  | -      | -    | 1370 (25 °C) | V <sub>RMS</sub>  | (2)                          |
|                      |                 | -      | -    | 1520 (0 °C)  | V <sub>RMS</sub>  | (2)                          |
| Operating Frequency  | F <sub>L</sub>  | 45     | -    | 80           | KHz               | (3)                          |
| Lamp Life Time       | L <sub>BL</sub> | 15,000 | -    | -            | Hrs               | (5)                          |
| Power Consumption    | P <sub>L</sub>  | -      | 4.08 | -            | W                 | (4), I <sub>L</sub> = 6.0 mA |

Note (1) Lamp current is measured by utilizing a high frequency current meter as shown below:

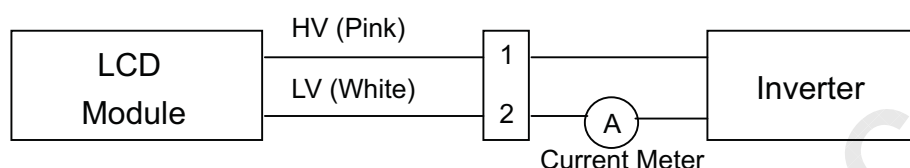

Note (2) The voltage that must be larger than V<sub>S</sub> should be applied to the lamp for more than 1 second after startup. Otherwise the lamp may not be turned on.

Note (3) The lamp frequency may produce interference with horizontal synchronous frequency from the display, and this may cause line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible.

Note (4)  $P_L = I_L \times V_L$

Note (5) The lifetime of lamp can be defined as the time in which it continues to operate under the condition Ta = 25 ± 2 °C and I<sub>L</sub> = 6 mA<sub>RMS</sub> until one of the following events occurs:

(a) When the brightness becomes or lower than 50% of its original value.

(b) When the effective ignition length becomes or lower than 80% of its original value.

(The effective ignition length is a scope that luminance is over 70% of that at the center point.)

Note (6) The waveform of the voltage output of inverter must be area-symmetric and the design of the inverter must have specifications for the modularized lamp. The performance of the Backlight, such as lifetime or brightness, is greatly influenced by the characteristics of the DC-AC inverter for the lamp. All the parameters of an inverter should be carefully designed to avoid producing too much current leakage from high voltage output of the inverter. When designing or ordering the inverter please make sure that a poor lighting caused by the mismatch of the Backlight and the inverter (miss-lighting, flicker, etc.) never occurs. If the above situation is confirmed, the module should be operated in the same manners when it is installed in your instrument.

The output of the inverter must have symmetrical (negative and positive) voltage waveform and symmetrical current waveform. (Unsymmetrical ratio is less than 10%) Please do not use the inverter which has unsymmetrical voltage and unsymmetrical current and spike wave. Lamp frequency may



**CHI MEI**  
OPTOELECTRONICS CORP.


Doc No.: 44084142  
Issued Date: May 06, 2008  
Model No.: N141C3 - L07

**Preliminary**

produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.

Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp. It shall help increase the lamp lifetime and reduce its leakage current.

- The asymmetry rate of the inverter waveform should be 10% below.
- The distortion rate of the waveform should be within  $\sqrt{2} \pm 10\%$ .
- The ideal sine wave form shall be symmetric in positive and negative polarities.

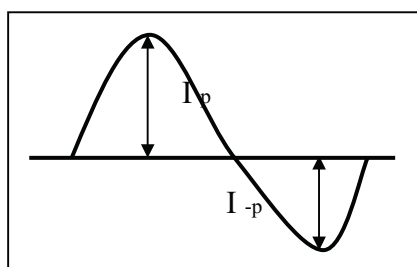

\* Asymmetry rate:


$$|I_p - I_{-p}| / I_{rms} * 100\%$$

\* Distortion rate

$$I_p \text{ (or } I_{-p}) / I_{rms}$$

## 4 BLOCK DIAGRAM

### 4.1 TFT LCD MODULE

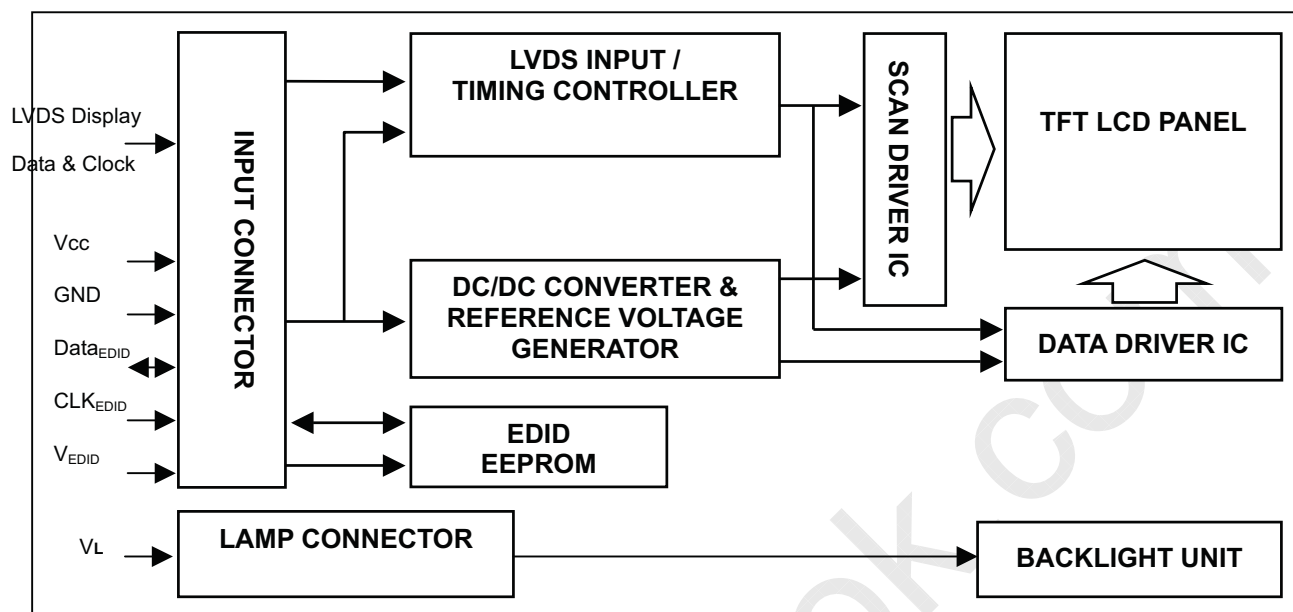

### 4.2 BACKLIGHT UNIT



## 5 INPUT TERMINAL PIN ASSIGNMENT


### 5.1 TFT LCD MODULE

| Pin | Symbol               | Description                         | Polarity | Remark |
|-----|----------------------|-------------------------------------|----------|--------|
| 1   | Vss                  | Ground                              |          |        |
| 2   | Vcc                  | Power Supply +3.3 V (typical)       |          |        |
| 3   | Vcc                  | Power Supply +3.3 V (typical)       |          |        |
| 4   | V <sub>EDID</sub>    | DDC 3.3V Power                      |          |        |
| 5   | NC                   | Non-Connection                      |          |        |
| 6   | CLK <sub>EDID</sub>  | DDC Clock                           |          |        |
| 7   | DATA <sub>EDID</sub> | DDC Data                            |          | -      |
| 8   | RXO0-                | LVDS Differential Data Input (Odd)  | Negative |        |
| 9   | RXO0+                | LVDS Differential Data Input (Odd)  | Positive |        |
| 10  | Vss                  | Ground                              |          |        |
| 11  | RXO1-                | LVDS Differential Data Input (Odd)  | Negative |        |
| 12  | RXO1+                | LVDS Differential Data Input (Odd)  | Positive |        |
| 13  | Vss                  | Ground                              |          |        |
| 14  | RXO2-                | LVDS Differential Data Input (Odd)  | Negative |        |
| 15  | RXO2+                | LVDS Differential Data Input (Odd)  | Positive |        |
| 16  | Vss                  | Ground                              |          |        |
| 17  | RXOC-                | LVDS Clock Data Input (Odd)         | Negative |        |
| 18  | RXOC+                | LVDS Clock Data Input (Odd)         | Positive |        |
| 19  | Vss                  | Ground                              |          |        |
| 20  | RxE0-                | LVDS Differential Data Input (Even) | Negative |        |
| 21  | RxE0+                | LVDS Differential Data Input (Even) | Positive |        |
| 22  | Vss                  | Ground                              |          |        |
| 23  | RxE1-                | LVDS Differential Data Input (Even) | Negative |        |
| 24  | RxE1+                | LVDS Differential Data Input (Even) | Positive |        |
| 25  | Vss                  | Ground                              |          |        |
| 26  | RxE2-                | LVDS Differential Data Input (Even) | Negative |        |
| 27  | RxE2+                | LVDS Differential Data Input (Even) | Positive |        |
| 28  | Vss                  | Ground                              |          |        |
| 29  | RXEC-                | LVDS Clock Data Input (Even)        | Negative |        |
| 30  | RXEC+                | LVDS Clock Data Input (Even)        | Positive |        |

Note (1) Connector Part No.: JAE-FI-XB30SRL-HF11 or equivalent

Note (2) User's connector Part No: JAE-FI-X30C2L or equivalent

Note (3) The first pixel is odd as shown in the following figure.

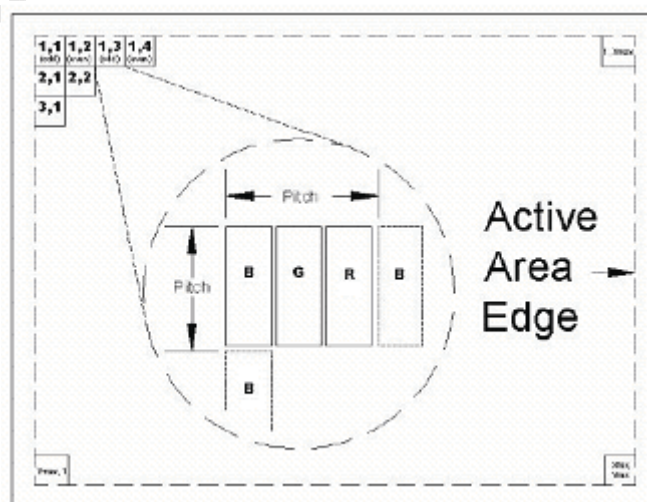


## 5.2 BACKLIGHT UNIT

| Pin | Symbol | Description  | Color |
|-----|--------|--------------|-------|
| 1   | HV     | High Voltage | Pink  |
| 2   | LV     | Ground       | White |

Note (1) Connector Part No.: JST- BHSR-02VS-1 or equivalent

Note (2) User's connector Part No.: SM02B-BHSS-1-TB or equivalent

## 5.3 TIMING DIAGRAM OF LVDS INPUT SIGNAL

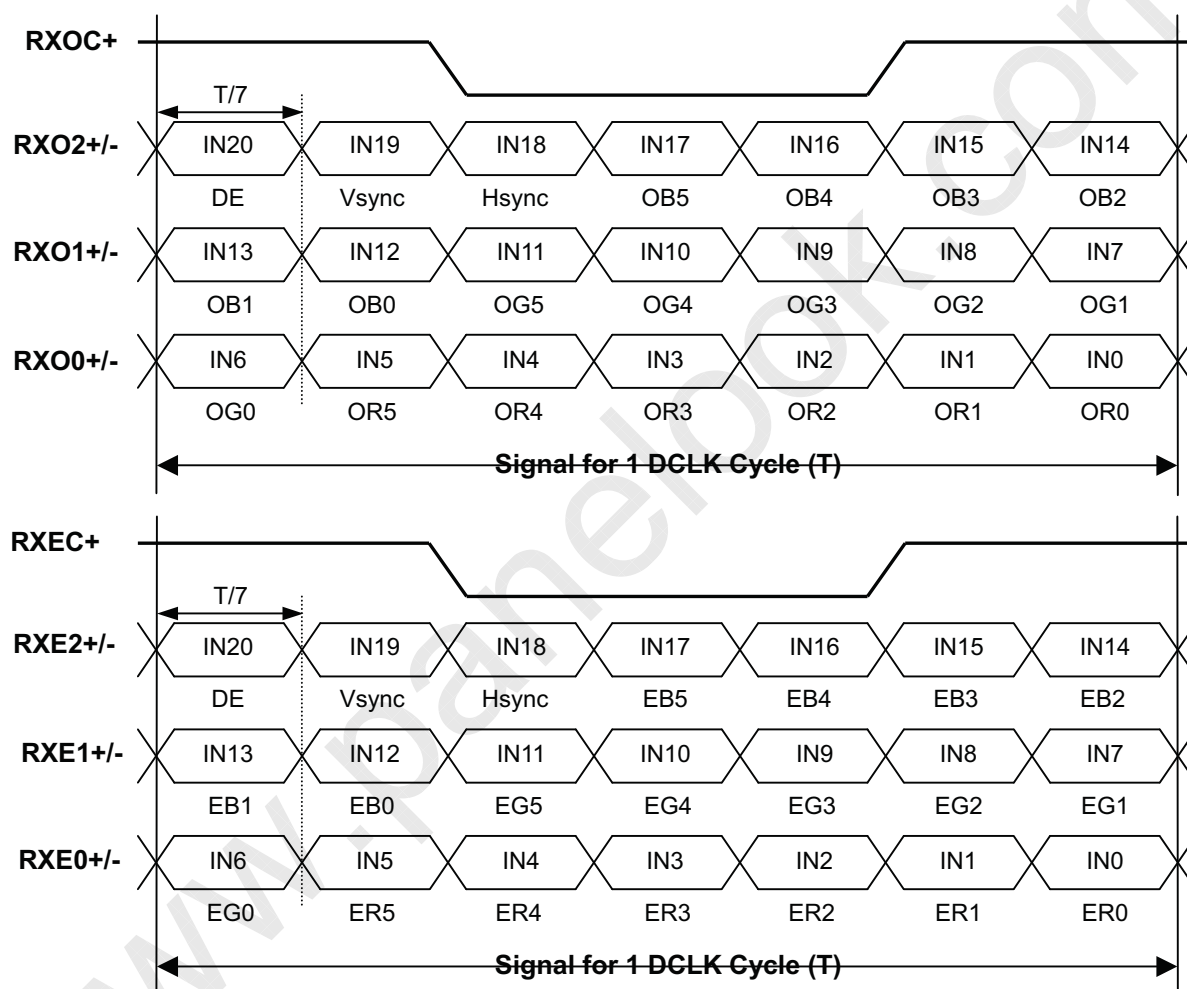



## 5.4 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

| Color               |               | Data Signal |    |    |    |    |    |       |    |    |    |    |    |      |    |    |    |    |    |
|---------------------|---------------|-------------|----|----|----|----|----|-------|----|----|----|----|----|------|----|----|----|----|----|
|                     |               | Red         |    |    |    |    |    | Green |    |    |    |    |    | Blue |    |    |    |    |    |
|                     |               | R5          | R4 | R3 | R2 | R1 | R0 | G5    | G4 | G3 | G2 | G1 | G0 | B5   | B4 | B3 | B2 | B1 | B0 |
| Basic Colors        | Black         | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red           | 1           | 1  | 1  | 1  | 1  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green         | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Blue          | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Cyan          | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Magenta       | 1           | 1  | 1  | 1  | 1  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Yellow        | 1           | 1  | 1  | 1  | 1  | 1  | 1     | 1  | 1  | 1  | 1  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | White         | 1           | 1  | 1  | 1  | 1  | 1  | 1     | 1  | 1  | 1  | 1  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
| Gray Scale Of Red   | Red(0)/Dark   | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(1)        | 0           | 0  | 0  | 0  | 0  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(2)        | 0           | 0  | 0  | 0  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Red(61)       | 1           | 1  | 1  | 1  | 0  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(62)       | 1           | 1  | 1  | 1  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
| Red(63)             | 1             | 1           | 1  | 1  | 1  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  |    |
| Gray Scale Of Green | Green(0)/Dark | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(1)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(2)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Green(61)     | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 0  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(62)     | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
| Green(63)           | 0             | 0           | 0  | 0  | 0  | 0  | 1  | 1     | 1  | 1  | 1  | 1  | 0  | 0    | 0  | 0  | 0  | 0  |    |
| Gray Scale Of Blue  | Blue(0)/Dark  | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Blue(1)       | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 1  |
|                     | Blue(2)       | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 1  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Blue(61)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 1    | 1  | 1  | 1  | 0  | 1  |
|                     | Blue(62)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 1    | 1  | 1  | 1  | 1  | 0  |
| Blue(63)            | 0             | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 1  | 1  |    |

Note (1) 0: Low Level Voltage, 1: High Level Voltage



## 5.5 EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPD1 standards.

| Byte #<br>(decimal) | Byte<br>(hex) | Field Name and Comments                      | Value<br>(hex) | Value<br>(binary) |
|---------------------|---------------|----------------------------------------------|----------------|-------------------|
| 0                   | 0             | Header                                       | 00             | 00000000          |
| 1                   | 1             | Header                                       | FF             | 11111111          |
| 2                   | 2             | Header                                       | FF             | 11111111          |
| 3                   | 3             | Header                                       | FF             | 11111111          |
| 4                   | 4             | Header                                       | FF             | 11111111          |
| 5                   | 5             | Header                                       | FF             | 11111111          |
| 6                   | 6             | Header                                       | FF             | 11111111          |
| 7                   | 7             | Header                                       | 00             | 00000000          |
| 8                   | 8             | EISA ID manufacturer name ("CMO")            | 0D             | 00001101          |
| 9                   | 9             | EISA ID manufacturer name (Compressed ASCII) | AF             | 10101111          |
| 10                  | 0A            | ID product code (N141C3-L01)                 | 30             | 00110000          |
| 11                  | 0B            | ID product code (hex LSB first; N141C3-L01)  | 14             | 00010100          |
| 12                  | 0C            | ID S/N (fixed "0")                           | 00             | 00000000          |
| 13                  | 0D            | ID S/N (fixed "0")                           | 00             | 00000000          |
| 14                  | 0E            | ID S/N (fixed "0")                           | 00             | 00000000          |
| 15                  | 0F            | ID S/N (fixed "0")                           | 00             | 00000000          |
| 16                  | 10            | Week of manufacture (fixed week code)        | 0B             | 00001011          |
| 17                  | 11            | Year of manufacture (fixed year code)        | 11             | 00010001          |
| 18                  | 12            | EDID structure version # ("1")               | 01             | 00000001          |
| 19                  | 13            | EDID revision # ("3")                        | 03             | 00000011          |
| 20                  | 14            | Video I/P definition ("digital")             | 80             | 10000000          |
| 21                  | 15            | Active area horizontal 30.348cm              | 1E             | 00011110          |
| 22                  | 16            | Active area vertical 18.9675cm               | 13             | 00010011          |
| 23                  | 17            | Display Gamma (Gamma = "2.2")                | 78             | 01111000          |
| 24                  | 18            | Feature support ("Active off, RGB Color")    | 0A             | 00001010          |
| 25                  | 19            | Rx1 Rx0 Ry1 Ry0 Gx1 Gx0 Gy1 Gy0              | 09             | 00001001          |
| 26                  | 1A            | Bx1 Bx0 By1 By0 Wx1 Wx0 Wy1 Wy0              | 05             | 00000101          |
| 27                  | 1B            | Rx=0.590                                     | 97             | 10010111          |
| 28                  | 1C            | Ry=0.340                                     | 57             | 01010111          |
| 29                  | 1D            | Gx=0.319                                     | 51             | 01010001          |
| 30                  | 1E            | Gy=0.541                                     | 8A             | 10001010          |
| 31                  | 1F            | Bx=0.152                                     | 27             | 00100111          |
| 32                  | 20            | By=0.125                                     | 20             | 00100000          |
| 33                  | 21            | Wx=0.313                                     | 50             | 01010000          |
| 34                  | 22            | Wy=0.329                                     | 54             | 01010100          |
| 35                  | 23            | Established timings 1                        | 00             | 00000000          |
| 36                  | 24            | Established timings 2                        | 00             | 00000000          |
| 37                  | 25            | Manufacturer's reserved timings              | 00             | 00000000          |
| 38                  | 26            | Standard timing ID # 1                       | 01             | 00000001          |
| 39                  | 27            | Standard timing ID # 1                       | 01             | 00000001          |
| 40                  | 28            | Standard timing ID # 2                       | 01             | 00000001          |
| 41                  | 29            | Standard timing ID # 2                       | 01             | 00000001          |
| 42                  | 2A            | Standard timing ID # 3                       | 01             | 00000001          |
| 43                  | 2B            | Standard timing ID # 3                       | 01             | 00000001          |





|    |    |                                                                                            |    |          |
|----|----|--------------------------------------------------------------------------------------------|----|----------|
| 44 | 2C | Standard timing ID # 4                                                                     | 01 | 00000001 |
| 45 | 2D | Standard timing ID # 4                                                                     | 01 | 00000001 |
| 46 | 2E | Standard timing ID # 5                                                                     | 01 | 00000001 |
| 47 | 2F | Standard timing ID # 5                                                                     | 01 | 00000001 |
| 48 | 30 | Standard timing ID # 6                                                                     | 01 | 00000001 |
| 49 | 31 | Standard timing ID # 6                                                                     | 01 | 00000001 |
| 50 | 32 | Standard timing ID # 7                                                                     | 01 | 00000001 |
| 51 | 33 | Standard timing ID # 7                                                                     | 01 | 00000001 |
| 52 | 34 | Standard timing ID # 8                                                                     | 01 | 00000001 |
| 53 | 35 | Standard timing ID # 8                                                                     | 01 | 00000001 |
| 54 | 36 | Detailed timing description # 1 Pixel clock ("107.8MHz", According to VESA CVT Rev1.1)     | 1C | 00011100 |
| 55 | 37 | # 1 Pixel clock (hex LSB first)                                                            | 2A | 00101010 |
| 56 | 38 | # 1 H active ("1440")                                                                      | A0 | 10100000 |
| 57 | 39 | # 1 H blank ("418")                                                                        | A2 | 10100010 |
| 58 | 3A | # 1 H active : H blank ("1440 : 418")                                                      | 51 | 01010001 |
| 59 | 3B | # 1 V active ("900")                                                                       | 84 | 10000100 |
| 60 | 3C | # 1 V blank ("67")                                                                         | 43 | 01000011 |
| 61 | 3D | # 1 V active : V blank ("900 : 67")                                                        | 30 | 00110000 |
| 62 | 3E | # 1 H sync offset ("126")                                                                  | 7E | 01111110 |
| 63 | 3F | # 1 H sync pulse width ("84")                                                              | 54 | 01010100 |
| 64 | 40 | # 1 V sync offset : V sync pulse width ("8 : 15")                                          | 8F | 10001111 |
| 65 | 41 | # 1 H sync offset : H sync pulse width : V sync offset : V sync width ("126: 84 : 8 : 15") | 00 | 00000000 |
| 66 | 42 | # 1 H image size ("303 mm")                                                                | 2F | 00101111 |
| 67 | 43 | # 1 V image size ("190 mm")                                                                | BE | 10111110 |
| 68 | 44 | # 1 H image size : V image size ("303 : 190")                                              | 10 | 00010000 |
| 69 | 45 | # 1 H boarder ("0")                                                                        | 00 | 00000000 |
| 70 | 46 | # 1 V boarder ("0")                                                                        | 00 | 00000000 |
| 71 | 47 | # 1 Non-interlaced, Normal, no stereo, Separate sync, H/V pol Negatives                    | 18 | 00011000 |
| 72 | 48 | Detailed timing description # 2                                                            | 00 | 00000000 |
| 73 | 49 | # 2 Flag                                                                                   | 00 | 00000000 |
| 74 | 4A | # 2 Reserved                                                                               | 00 | 00000000 |
| 75 | 4B | # 2 FE (hex) defines ASCII string (Model Name "N141C3-L01", ASCII)                         | FE | 11111110 |
| 76 | 4C | # 2 Flag                                                                                   | 00 | 00000000 |
| 77 | 4D | # 2 1st character of name ("N")                                                            | 4E | 01001110 |
| 78 | 4E | # 2 2nd character of name ("1")                                                            | 31 | 00110001 |
| 79 | 4F | # 2 3rd character of name ("4")                                                            | 34 | 00110100 |
| 80 | 50 | # 2 4th character of name ("1")                                                            | 31 | 00110001 |
| 81 | 51 | # 2 5th character of name ("C")                                                            | 43 | 01000011 |
| 82 | 52 | # 2 6th character of name ("3")                                                            | 33 | 00110011 |
| 83 | 53 | # 2 7th character of name ("-")                                                            | 2D | 00101101 |
| 84 | 54 | # 2 8th character of name ("L")                                                            | 4C | 01001100 |
| 85 | 55 | # 2 9th character of name ("0")                                                            | 30 | 00110000 |
| 86 | 56 | # 2 9th character of name ("1")                                                            | 31 | 00110001 |
| 87 | 57 | # 2 New line character indicates end of ASCII string                                       | 0A | 00001010 |
| 88 | 58 | # 2 Padding with "Blank" character                                                         | 20 | 00100000 |
| 89 | 59 | # 2 Padding with "Blank" character                                                         | 20 | 00100000 |



|     |    |                                                                   |    |          |
|-----|----|-------------------------------------------------------------------|----|----------|
| 90  | 5A | Detailed timing description # 3                                   | 00 | 00000000 |
| 91  | 5B | # 3 Flag                                                          | 00 | 00000000 |
| 92  | 5C | # 3 Reserved                                                      | 00 | 00000000 |
| 93  | 5D | # 3 FE (hex) defines ASCII string (Vendor "CMO", ASCII)           | FE | 11111110 |
| 94  | 5E | # 3 Flag                                                          | 00 | 00000000 |
| 95  | 5F | # 3 1st character of string ("C")                                 | 43 | 01000011 |
| 96  | 60 | # 3 2nd character of string ("M")                                 | 4D | 01001101 |
| 97  | 61 | # 3 3rd character of string ("O")                                 | 4F | 01001111 |
| 98  | 62 | # 3 New line character indicates end of ASCII string              | 0A | 00001010 |
| 99  | 63 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 100 | 64 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 101 | 65 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 102 | 66 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 103 | 67 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 104 | 68 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 105 | 69 | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 106 | 6A | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 107 | 6B | # 3 Padding with "Blank" character                                | 20 | 00100000 |
| 108 | 6C | Detailed timing description # 4                                   | 00 | 00000000 |
| 109 | 6D | # 4 Flag                                                          | 00 | 00000000 |
| 110 | 6E | # 4 Reserved                                                      | 00 | 00000000 |
| 111 | 6F | # 4 FE (hex) defines ASCII string (Model Name"N141C3-L01", ASCII) | FE | 11111110 |
| 112 | 70 | # 4 Flag                                                          | 00 | 00000000 |
| 113 | 71 | # 4 1st character of name ("N")                                   | 4E | 01001110 |
| 114 | 72 | # 4 2nd character of name ("1")                                   | 31 | 00110001 |
| 115 | 73 | # 4 3rd character of name ("4")                                   | 34 | 00110100 |
| 116 | 74 | # 4 4th character of name ("1")                                   | 31 | 00110001 |
| 117 | 75 | # 4 5th character of name ("C")                                   | 43 | 01000011 |
| 118 | 76 | # 4 6th character of name ("3")                                   | 33 | 00110011 |
| 119 | 77 | # 4 7th character of name ("-")                                   | 2D | 00101101 |
| 120 | 78 | # 4 8th character of name ("L")                                   | 4C | 01001100 |
| 121 | 79 | # 4 9th character of name ("0")                                   | 30 | 00110000 |
| 122 | 7A | # 4 9th character of name ("1")                                   | 31 | 00110001 |
| 123 | 7B | # 4 New line character indicates end of ASCII string              | 0A | 00001010 |
| 124 | 7C | # 4 Padding with "Blank" character                                | 20 | 00100000 |
| 125 | 7D | # 4 Padding with "Blank" character                                | 20 | 00100000 |
| 126 | 7E | Extension flag                                                    | 00 | 00000000 |
| 127 | 7F | Checksum                                                          | 9C | 10011100 |



## 6 INTERFACE TIMING

### 6.1 INPUT SIGNAL TIMING SPECIFICATIONS


The specifications of input signal timing are as the following table and timing diagram.

| Signal | Item                              | Symbol | Min.   | Typ. | Max.   | Unit | Note |
|--------|-----------------------------------|--------|--------|------|--------|------|------|
| DCLK   | Frequency                         | 1/Tc   | 25     | 44.5 | 60     | MHz  | (2)  |
| DE     | Vertical Total Time               | TV     | 910    | 926  | 1500   | TH   | -    |
|        | Vertical Active Display Period    | TVD    | 900    | 900  | 900    | TH   | -    |
|        | Vertical Active Blanking Period   | TVB    | TV-TVD | 26   | TV-TVD | TH   |      |
|        | Horizontal Total Time             | TH     | 760    | 800  | 1000   | Tc   | (2)  |
|        | Horizontal Active Display Period  | THD    | 720    | 720  | 720    | Tc   | (2)  |
|        | Horizontal Active Blanking Period | THB    | TH-THD | 80   | TH-THD | Tc   | (2)  |


Note (1) Because this module is operated by DE only mode, Hsync and Vsync are ignored.

(2) 2 channels LVDS input.

#### INPUT SIGNAL TIMING DIAGRAM

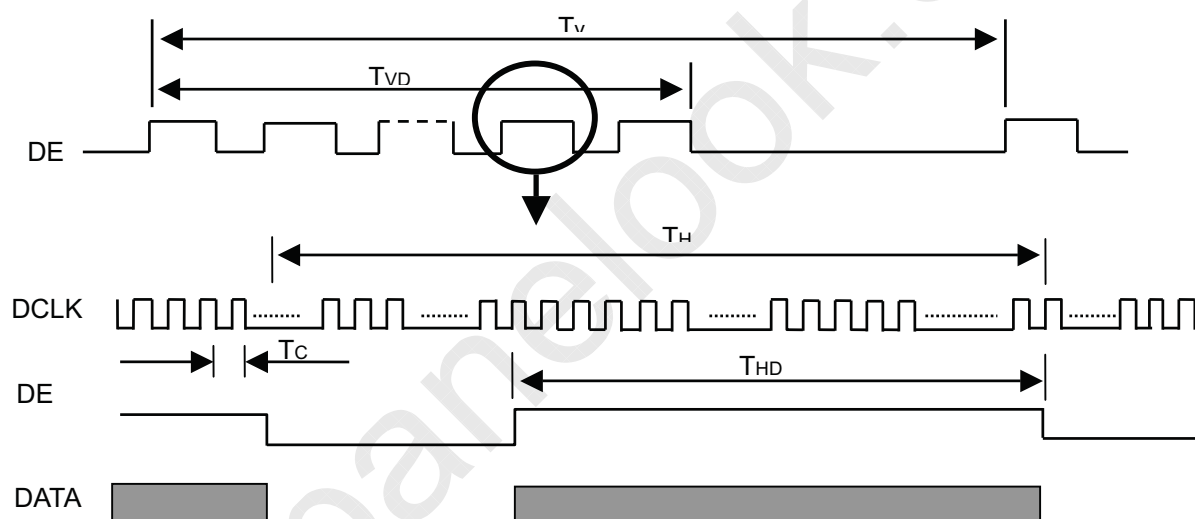

## 6.2 POWER ON/OFF SEQUENCE

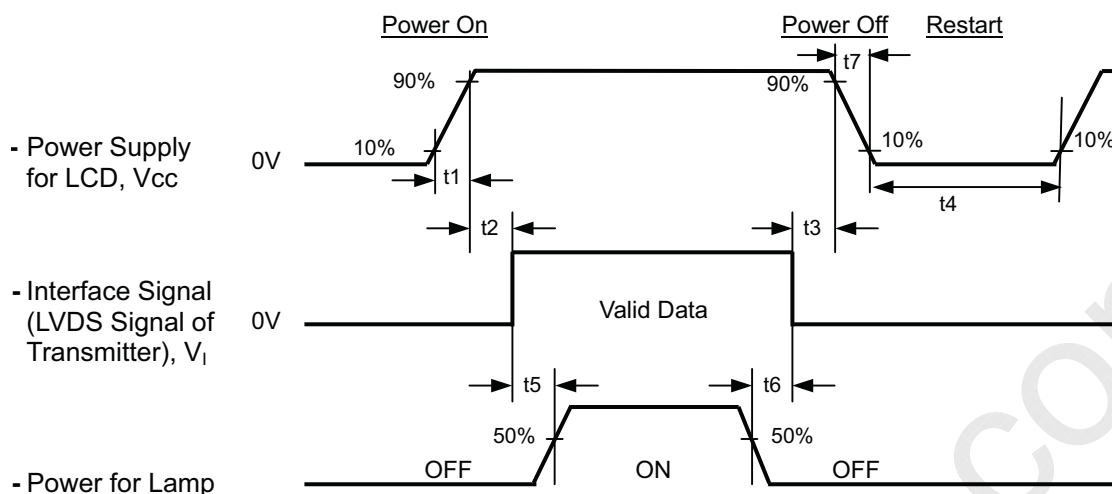

### Timing Specifications:

- $0.5 < t_1 \leq 10 \text{ msec}$
- $0 < t_2 \leq 50 \text{ msec}$
- $0 < t_3 \leq 50 \text{ msec}$
- $t_4 \geq 500 \text{ msec}$
- $t_5 \geq 200 \text{ msec}$
- $t_6 \geq 200 \text{ msec}$

Note (1) Please follow the power on/off sequence described above. Otherwise, the LCD module might be damaged.

Note (2) Please avoid floating state of interface signal at invalid period. When the interface signal is invalid, be sure to pull down the power supply of LCD V<sub>cc</sub> to 0 V.

Note (3) The Backlight inverter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight inverter power must be turned off before the power supply for the logic and the interface signal is invalid.

Note (4) Sometimes some slight noise shows when LCD is turned off (even backlight is already off). To avoid this phenomenon, we suggest that the V<sub>cc</sub> falling time is better to follow  $5 \leq t_7 \leq 300 \text{ ms}$ .

## 7 OPTICAL CHARACTERISTICS

### 7.1 TEST CONDITIONS

| Item                       | Symbol                                                        | Value | Unit |
|----------------------------|---------------------------------------------------------------|-------|------|
| Ambient Temperature        | T <sub>a</sub>                                                | 25±2  | °C   |
| Ambient Humidity           | H <sub>a</sub>                                                | 50±10 | %RH  |
| Supply Voltage             | V <sub>CC</sub>                                               | 3.3   | V    |
| Input Signal               | According to typical value in "3. ELECTRICAL CHARACTERISTICS" |       |      |
| Inverter Current           | I <sub>L</sub>                                                | 6.0   | mA   |
| Inverter Driving Frequency | F <sub>L</sub>                                                | 61    | KHz  |
| Inverter                   | Sumida H05-4915                                               |       |      |

The relative measurement methods of optical characteristics are shown in 7.2. The following items should be measured under the test conditions described in 7.1 and stable environment shown in Note (6).

### 7.2 OPTICAL SPECIFICATIONS

| Item                       |            | Symbol           | Condition                                                    | Min.         | Typ.    | Max.         | Unit              | Note     |
|----------------------------|------------|------------------|--------------------------------------------------------------|--------------|---------|--------------|-------------------|----------|
| Contrast Ratio             |            | CR               | $\theta_x=0^\circ, \theta_y=0^\circ$<br>Viewing Normal Angle | (250)        | (400)   | -            | -                 | (2), (5) |
| Response Time              |            | T <sub>R</sub>   |                                                              | -            | 3       | 8            | ms                | (3)      |
|                            |            | T <sub>F</sub>   |                                                              | -            | 7       | 12           | ms                |          |
| Average Luminance of White |            | L <sub>AVE</sub> |                                                              | 170          | 200     | -            | cd/m <sup>2</sup> | (4), (5) |
| White Variation            |            | $\delta W$ 5pts  |                                                              | -            | -       | 1.4          | -                 | (5)(6)   |
| Color Chromaticity         | Red        | R <sub>x</sub>   |                                                              | TYP<br>-0.03 | (0.610) | TYP<br>+0.03 | -                 | (1), (5) |
|                            |            | R <sub>y</sub>   |                                                              |              | (0.331) |              | -                 |          |
|                            | Green      | G <sub>x</sub>   |                                                              |              | (0.298) |              | -                 |          |
|                            |            | G <sub>y</sub>   |                                                              |              | (0.548) |              | -                 |          |
|                            | Blue       | B <sub>x</sub>   |                                                              |              | (0.160) |              | -                 |          |
|                            |            | B <sub>y</sub>   |                                                              |              | (0.156) |              | -                 |          |
|                            | White      | W <sub>x</sub>   |                                                              |              | 0.313   |              | -                 |          |
|                            |            | W <sub>y</sub>   |                                                              |              | 0.329   |              | -                 |          |
| Viewing Angle              | Horizontal | $\theta_{x+}$    | CR≥10                                                        | 40           | 45      | -            | Deg.              |          |
|                            |            | $\theta_{x-}$    |                                                              | 40           | 45      | -            |                   |          |
|                            | Vertical   | $\theta_{y+}$    |                                                              | 15           | 20      | -            |                   |          |
|                            |            | $\theta_{y-}$    |                                                              | 40           | 45      | -            |                   |          |




**CHI MEI**  
OPTOELECTRONICS CORP.

Doc No.: 44084142  
Issued Date: May 06, 2008  
Model No.: N141C3 - L07

**Preliminary**

Note (1) Definition of Viewing Angle ( $\theta_x$ ,  $\theta_y$ ):

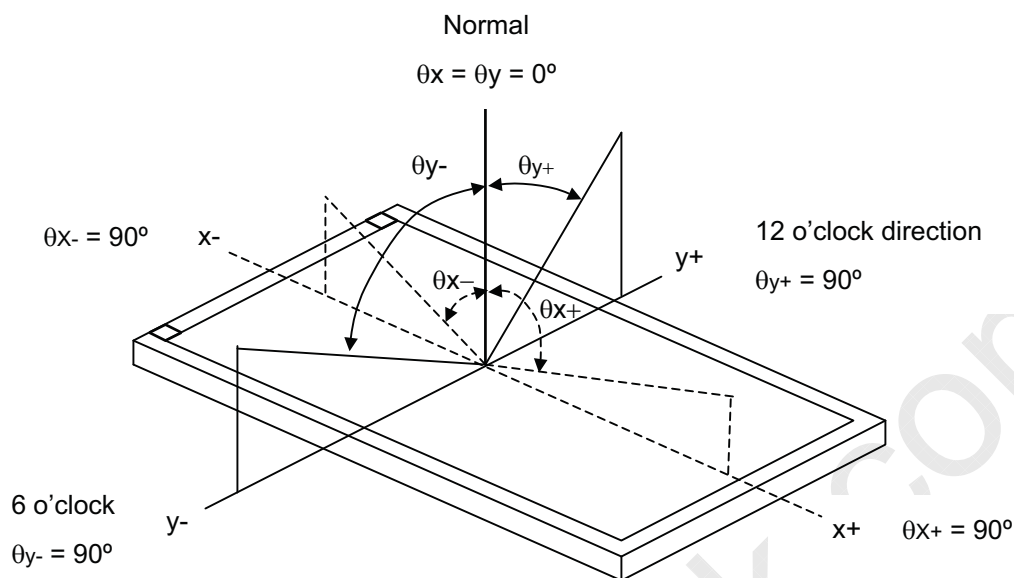

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

$$\text{CR} = \text{CR} (5)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time ( $T_R$ ,  $T_F$ ):

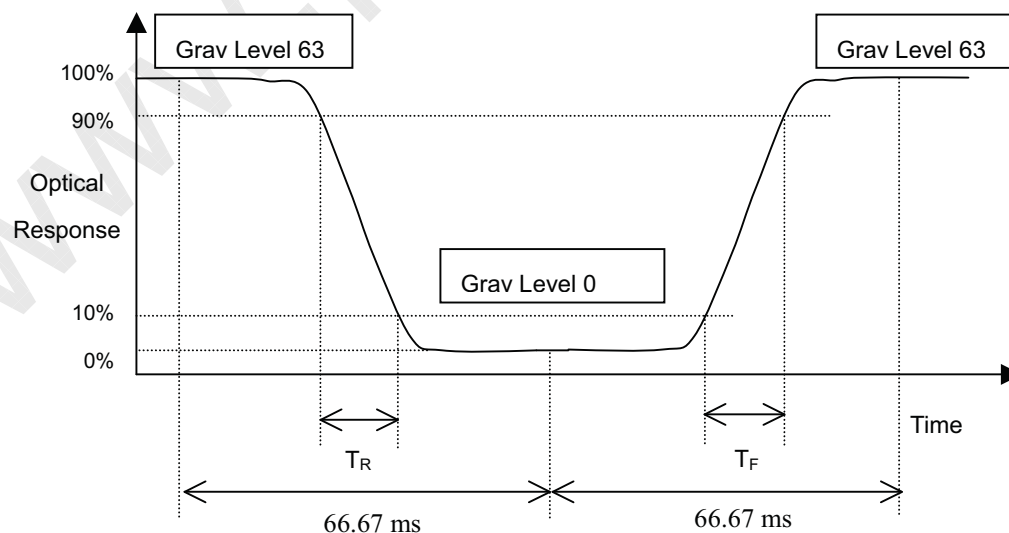

Note (4) Definition of Average Luminance of White ( $L_{AVE}$ ):


Measure the luminance of gray level 63 at 5 points

$$L_{AVE} = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$$

$L(x)$  is corresponding to the luminance of the point X at Figure in Note (6)

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

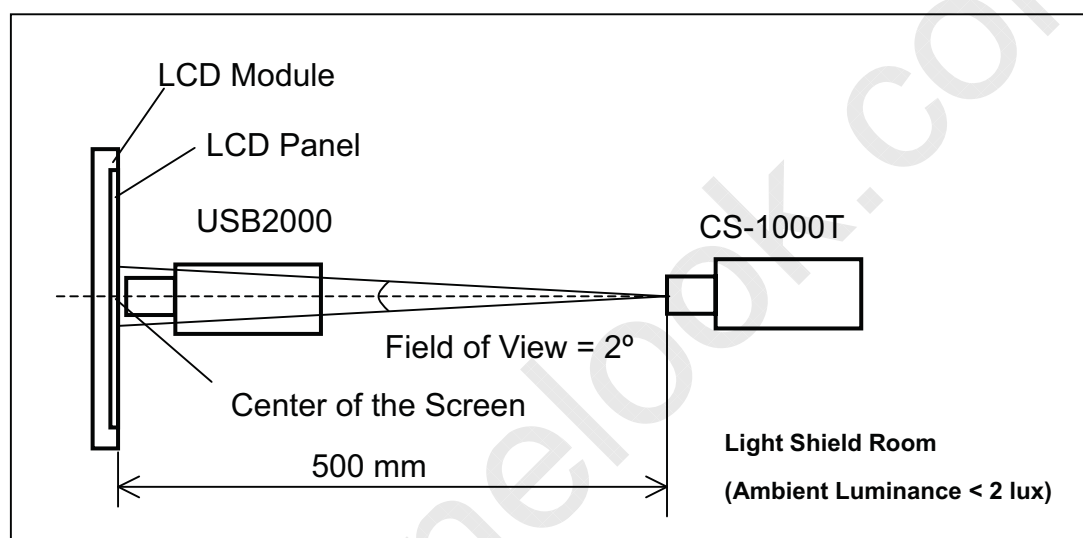

Note (6) Definition of White Variation ( $\delta W$ ):

Measure the luminance of gray level 63 at 5 points

$$\delta W = \text{Maximum} [L(1), L(2), L(3), L(4), L(5)] / \text{Minimum} [L(1), L(2), L(3), L(4), L(5)]$$

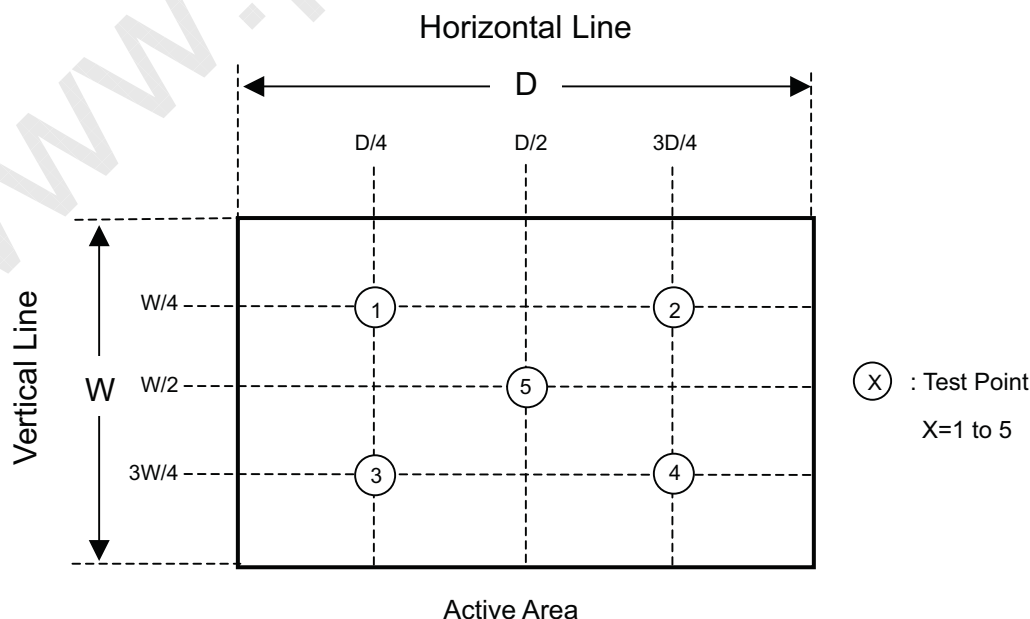



## 8 PRECAUTIONS

### 8.1 ASSEMBLY AND HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the lamp wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.
- (12) To avoid wireless noise interference, please keep the antenna away from LCD control board.

### 8.2 SAFETY PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

### 8.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while

**CHI MEI**  
OPTOELECTRONICS CORP.

Doc No.: 44084142

Issued Date: May 06, 2008

Model No.: N141C3 - L07

**Preliminary**

assembling with inverter. Do not disassemble the module or insert anything into the Backlight unit.


[www.panelook.com](http://www.panelook.com)



## 9 PACKAGING

### 9.1 CARTON


Box Dimensions : 435(L)\*350(W)\*325(H)  
 Weight: Approx. 10.69kg(20 module ,per. 1 box)

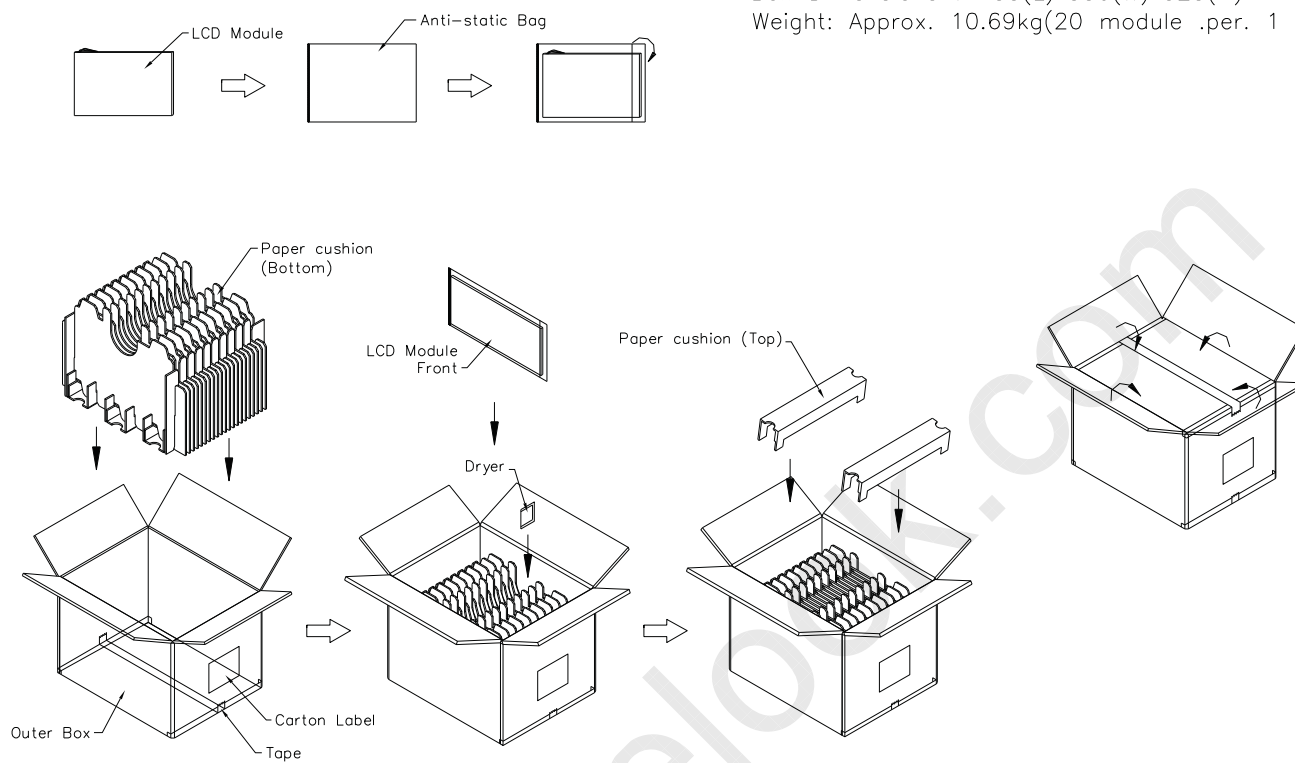


**Figure. 9-1 Packing method**

## 9.2 PALLET

### Sea & Land Transportation

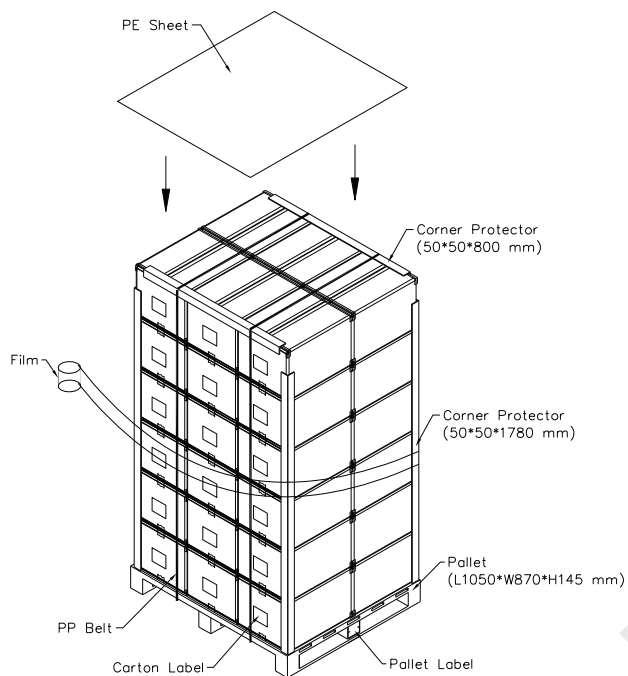

### Air Transportation

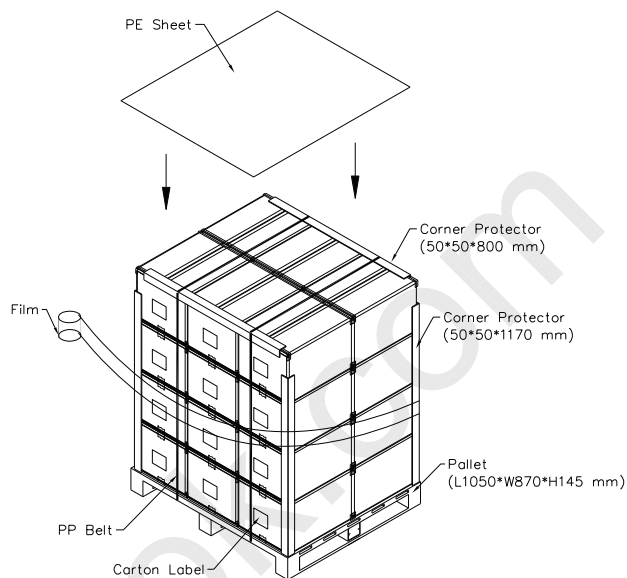

**Figure. 9-2 Packing method**


## 10 DEFINITION OF LABELS

### 10.1 CMO MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



- (a) Model Name: N141C3 - L07  
 (b) Revision: Rev. XX, for example: A1, ..., C1, C2 ...etc.  
 (c) Serial ID: X X X X X X Y M D X N N N N

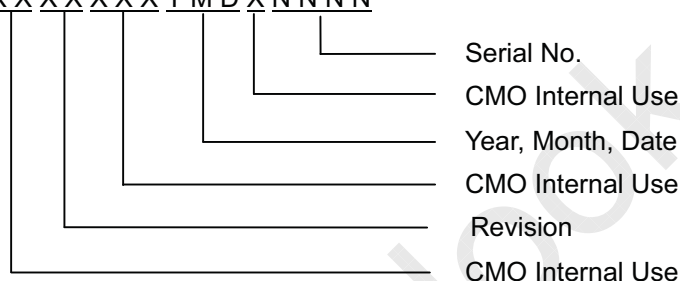

- (d) Production Location: MADE IN XXXX. XXXX stands for production location.  
 (e) LEOO: UL compliance remarks for CMO NingBo site production. It won't be available when production location isn't CMO NingBo.

Serial ID includes the information as below:

- (a) Manufactured Date: Year: 1~9, for 2001~2009  
                                   Month: 1~9, A~C, for Jan. ~ Dec.  
                                   Day: 1~9, A~Y, for 1<sup>st</sup> to 31<sup>st</sup>, exclude I , O and U  
 (b) Revision Code: cover all the change  
 (c) Serial No.: Manufacturing sequence of product

## 10.2 CMO CARTON LABEL



The image shows a sample of a CMO CARTON LABEL. It is a rectangular form with a light blue background and a grid pattern. At the top left, there is a small square logo with the letter 'm' inside. Below it, the text 'CHI MEI OPTOELECTRONICS' is printed. The form contains several fields for information: 'PO, NO.' followed by a line, 'Part ID.' followed by a line, 'Model Name' followed by a line, and 'Carton ID.' followed by a line. To the right of the 'Carton ID.' line, the word 'Quantities' is printed. In the center of the form, the letters 'CMO' are printed in a large, bold, light blue font. At the bottom left, the text 'Made in XXXX' is printed. At the bottom right, there is a circular logo with 'GP' inside and 'RoHS' printed below it.

(a) Production location: Made In XXXX. XXXX stands for production location.

| Sl No | Date | Description | Charged By | Approved By | EON No. | Remark |
|-------|------|-------------|------------|-------------|---------|--------|
|       |      |             |            |             |         |        |
|       |      |             |            |             |         |        |
|       |      |             |            |             |         |        |

